

Stepping Motor



http://www.casa.co.nz

Edition: 11/11/2011

General Data

Type #: P1M-U12S-435

Brand: Nippon Electric (Densei Japan)

OEM #: P1M-U12S-435

Spec:

Frame: NEMA 17

Steps: 200/rev (1.8 Degrees per fullstep or finer with micro-stepping)?

Current: 0.38 Amp

Volts: 12 Vdc (estimated)

Torque: ___ Nm @ ___A (__ oz.in.)

Resistance: 31 Ohms / phase (nominal)

Inductance: 18 mH / phase (nominal)

Connector: 6 way x 0.1" (see diag.)


(If fitted)

Wires: 6 wire (up to 360mm nominal)

Shaft: 5.0mm dia x 13mm long. **Shaft-Detail:** Plain, single ended. **Size:** 42 x 42 x 33 mm (nominal)

Supply-Max: 24~75Vdc (recommended

max = V x 25) **Weight:** 0.205kg Type: P1M-U125-435

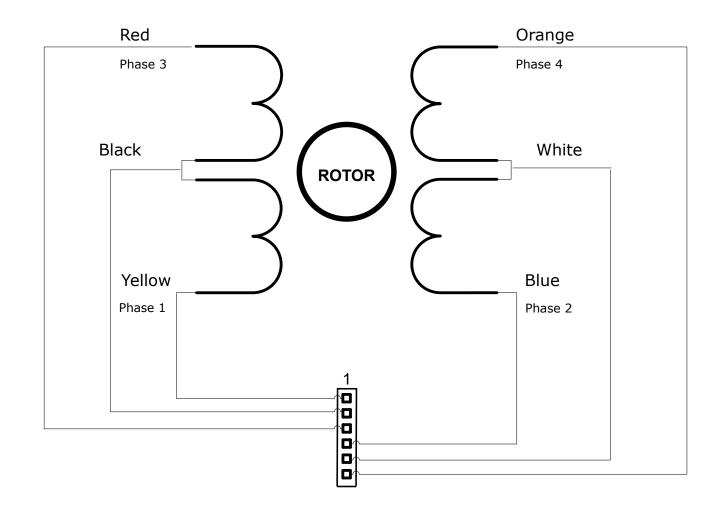

NOTICE – the information on this page is not guaranteed for accuracy – CASA accepts no responsibility (expressed or implied) for any errors or the consequence therefrom.

Condition: Used (refurbished) **Notes:** 11mm 20T gear may be