

TOSHIBA CMOS DIGITAL INTEGRATED CIRCUIT SILICON MONOLITHIC

T6A92

COLUMN DRIVER LSI FOR A DOT MATRIX LCD

The T6A92 is a column driver with 80 output channels for a dot matrix LCD.


The T6A92 realizes low power LCD systems using the CMOS Si-Gate process.

The T6A92 has two types of data flow.

(1) O₁ → O₈₀, (2) O₈₀ → O₁


Features

- 80-output column driver
- Data input format : 1-bit (ENABLE mode)
: 2-bit (SHIFT mode)
- Two types of data flow:
 - (1) O₁ → O₈₀
 - (2) O₈₀ → O₁
- Low power consumption
- Power supply : 5 V ± 10%
- 100-pin plastic flat package

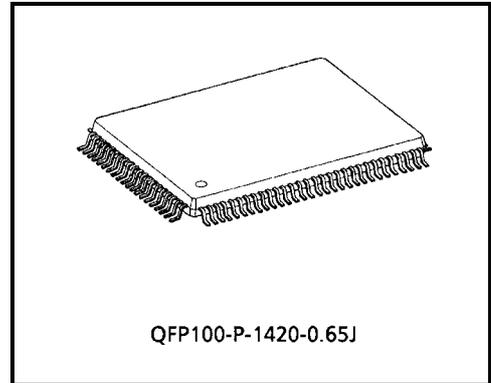


Weight: 1.6 g (typ.)

Pin Assignment

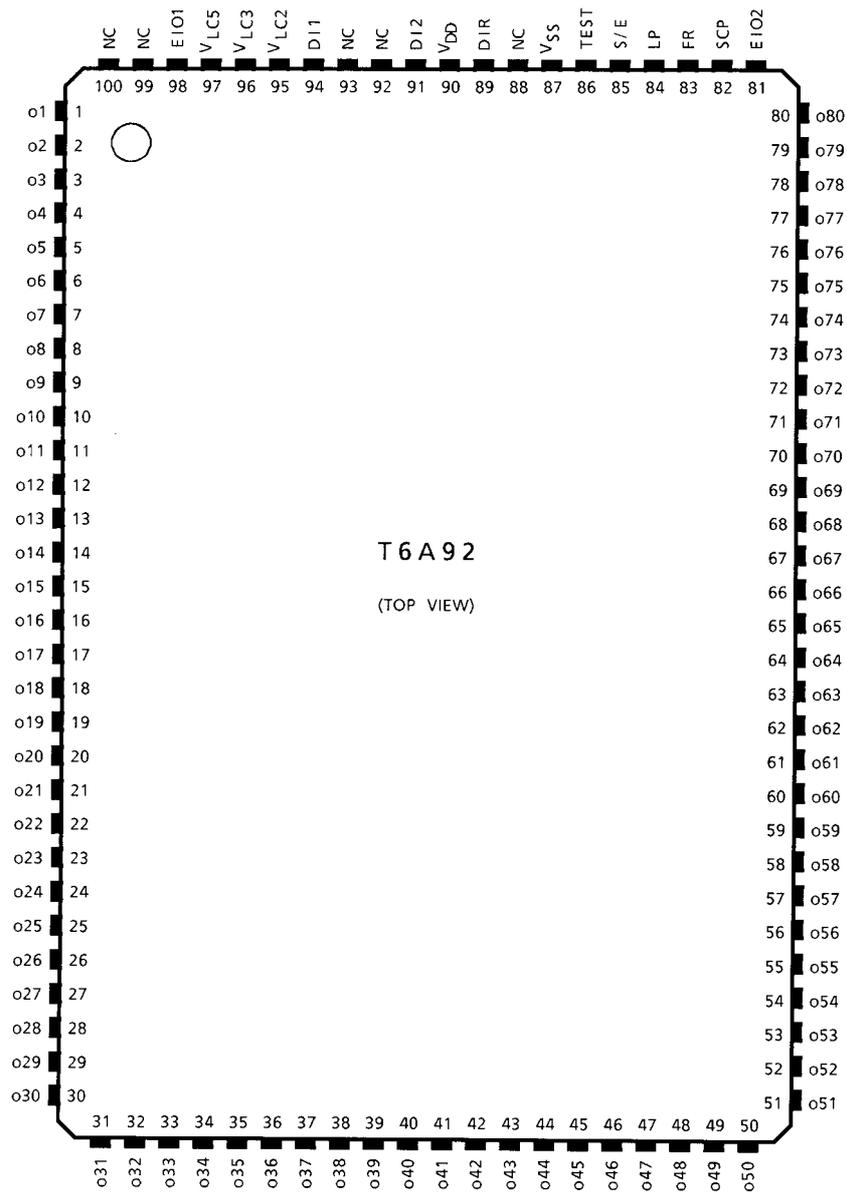

Block Diagram

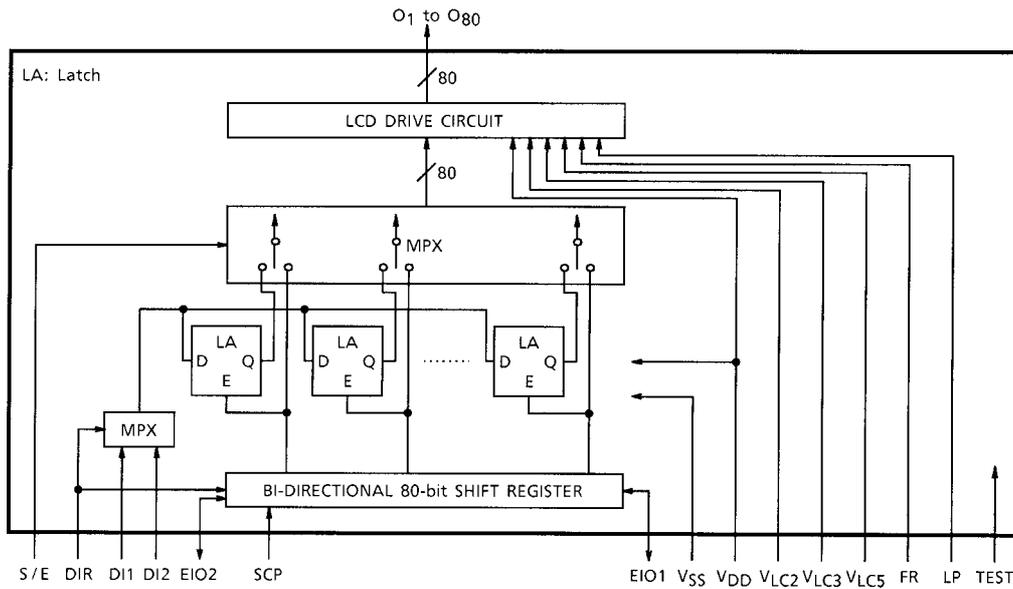


Pin Functions

Pin Name	I / O	Functions	Level
O1 to O80	Output	LCD drive signal output	V_{DD} to V_{LC5}
D11, D12	Input	Data signal input	V_{DD} to V_{SS}
EIO1, EIO2	I / O	ENABLE signal input / output When S / E = H, this pin is for input.	
SCP	Input	(Shift Clock Pulse) Shift clock pulse input	
FR	Input	(Frame) Frame signal input	
LP	Input	(Latch Pulse) Latch pulse signal input	
S / E	Input	Input for mode selection	
DIR	Input	Input data flow direction select	
TEST	Input	Test pin: usually connected to V_{SS} (0 V)	
$V_{LC2, 3, 5}$	—	Power supply for LCD drive	—
V_{DD}	—	Power supply (5 V)	
V_{SS}	—	Power supply (0 V)	

Function of Data and Enable Pins

S / E DIR	DI1	DI2	EIO1	EIO2	Data Flow	First Data	Last Data	Mode
L L	Open	DATA INPUT	ENABLE signal input	ENABLE signal output	$O_{80} \rightarrow O_1$	O_1	O_{80}	ENABLE
L H	DATA INPUT	Open	ENABLE signal output	ENABLE signal input	$O_1 \rightarrow O_{80}$	O_{80}	O_1	
H L	Open	Open	DATA INPUT	DATA OUTPUT	$O_1 \rightarrow O_{80}$	O_{80}	O_1	SHIFT
H H	Open	Open	DATA OUTPUT	DATA INPUT	$O_{80} \rightarrow O_1$	O_1	O_{80}	

Timing Diagram

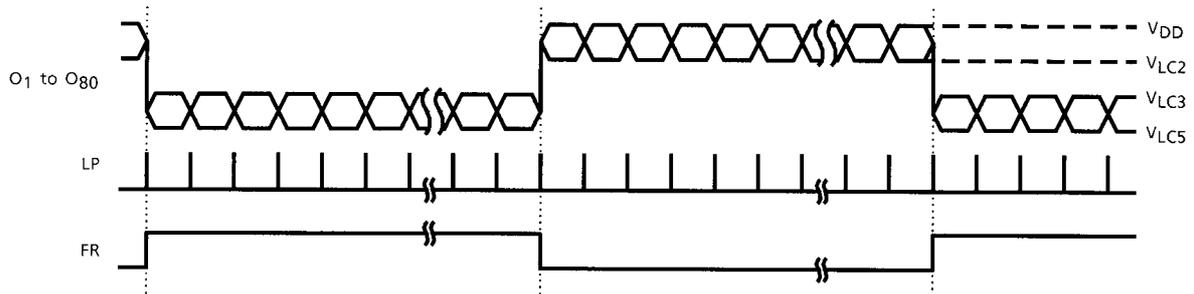

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Rating	Unit
Supply Voltage (1)	V_{DD} (Note 1)	-0.3 to 7.0	V
Supply Voltage (2)	$V_{LC2}, V_{LC3}, V_{LC5}$ (Note 1, 2)	-0.3 to 7.0	V
Input Voltage	V_{IN} (Note 1)	-0.3 to $V_{DD} + 0.3$	V
Operating Temperature	T_{opr}	-20 to 75	°C
Storage Temperature	T_{stg}	-55 to 125	°C

Note 1: Referenced to $V_{SS} = 0$ V

Note 2: Ensure that the following condition is always maintained.

$$V_{DD} \geq V_{LC2} \geq V_{LC3} \geq V_{LC5}$$

Electrical Characteristics

DC Characteristics


Test Conditions

(Unless Otherwise Noted, $V_{SS} = 0\text{ V}$, $V_{DD} = 5.0\text{ V} \pm 10\%$, $V_{LC5} = 0\text{ V}$, $T_a = -20\text{ to }75^\circ\text{C}$)

Item	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit	Pin Name	
Operating Voltage (1)	—	—	—	4.5	5.0	5.5	V	V_{DD}	
Operating Voltage (2)	—	—	—	0	—	$V_{DD} - 3.0$	V	V_{LC5}	
Input voltage	H Level	V_{IH}	—	$V_{DD} - 1.0$	—	V_{DD}	V	(Note)	
	L Level	V_{IL}	—	0	—	1.0	V	(Note)	
Output voltage	H Level	V_{OH}	—	$V_{DD} - 0.4$	—	V_{DD}	V	EIO1, EIO2	
	L Level	V_{OL}	—	0	—	0.4	V	EIO1, EIO2	
Output Resistance	R_{COL}	—	$I_d = \pm 50\ \mu\text{A}$	—	—	30	k Ω	O ₁ to O ₈₀	
Operating Frequency	f_{scp}	—	$T_a = -20\text{ to }75^\circ\text{C}$	—	—	400	kHz	SCP	
Current Consumption	I_{SS}	—	$V_{DD} = 5.0\text{ V}$ $V_{LC2} = 3.0\text{ V}$ $V_{LC3} = 2.0\text{ V}$ $V_{LC5} = 0.0\text{ V}$ $f_{FR} = 39\text{ Hz}$ $f_{scp} = 250\text{ kHz}$ O ₁ to O ₈₀ : No Load	Binary Data Input	—	—	1.0	mA	V_{SS}
				Input Data : LOW Constant	—	—	0.4	mA	

Note: SCP, LP, FR, EIO1, EIO2, DI1, DI2, DIR, S / E, TEST

AC Characteristics

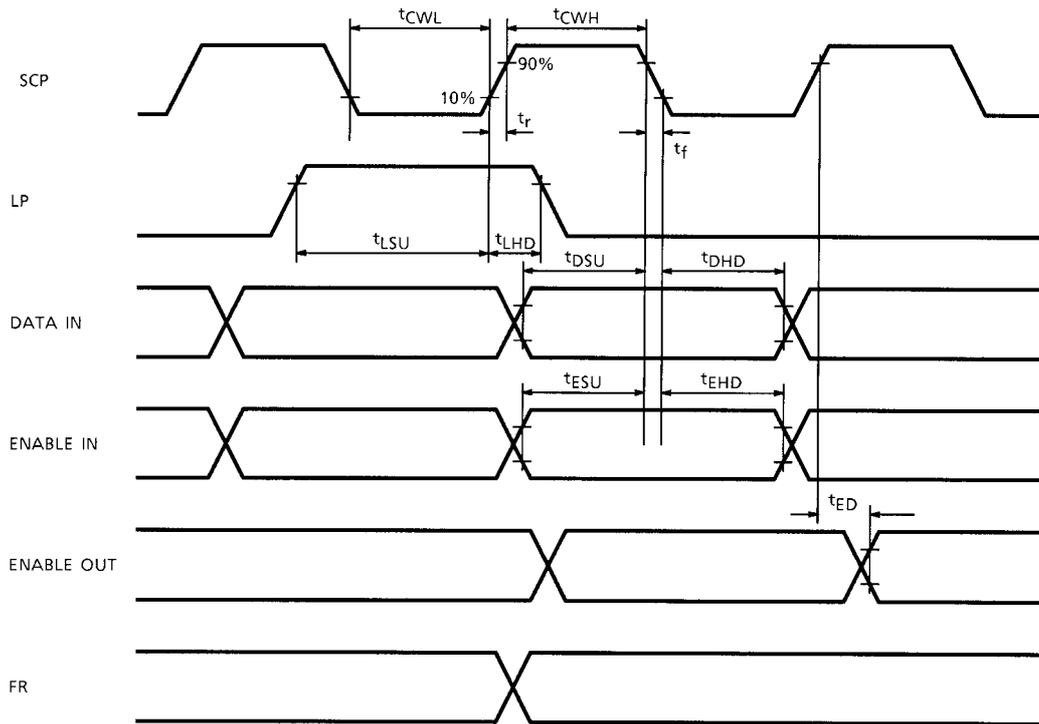


Test Conditions

(Unless Otherwise Noted, $V_{SS} = 0\text{ V}$, $V_{DD} = 5\text{ V} \pm 10\%$, $V_{LC5} = 0\text{ V}$, $T_a = -20\text{ to }75^\circ\text{C}$)

Item	Symbol	Min	Max	Unit
Operating Frequency	f_{scp}	—	400	kHz
SCP Pulse Width	t_{CWH}, t_{CWL}	800	—	ns
SCP Rise / Fall Time	t_r, t_f	—	200	ns
LP Set-up Time	t_{LSU}	500	—	ns
LP Hold Time	t_{LHD}	—	10	ns
Data Set-up Time	t_{DSU} (Note 1)	300	—	ns
Data Hold Time	t_{DHD} (Note 1)	300	—	ns
Enable Set-up Time	t_{ESU} (Note 2)	300	—	ns
Enable Hold Time	t_{EHD} (Note 2)	300	—	ns
Enable Delay Time	t_{ED} (Note 3)	—	500	ns


Note 1: Applies to DI1 and DI2
 Note 2: Applies to EIO1 and EIO2
 Note 3: With load circuit connected

Load Circuit




Application Circuit

- S / E = L (ENABLE mode)

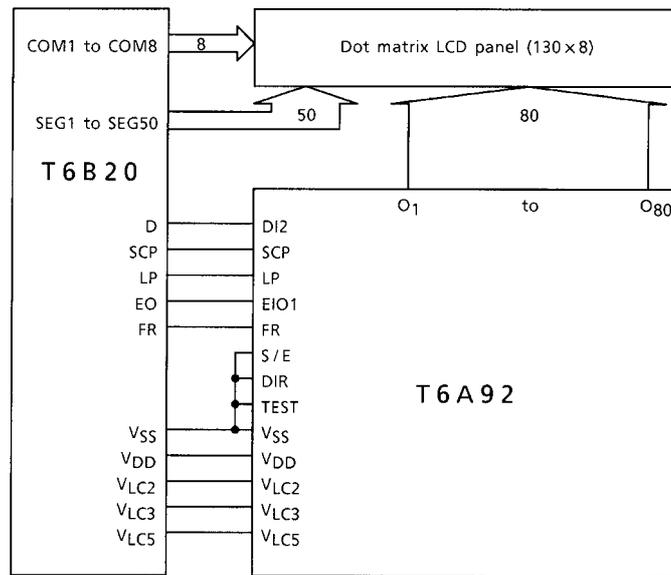





- S / E = H (SHIFT mode)

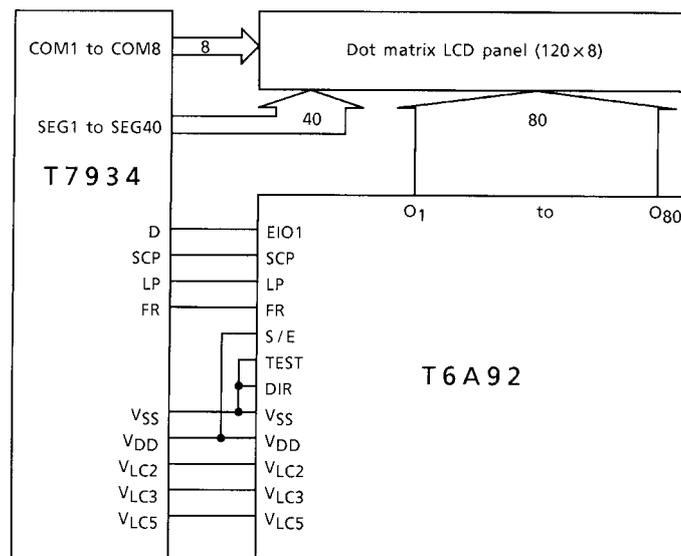

Package Dimensions

QFP100-P-1420-0.65J

Unit : mm

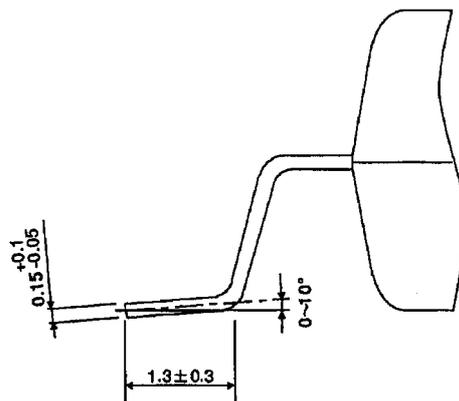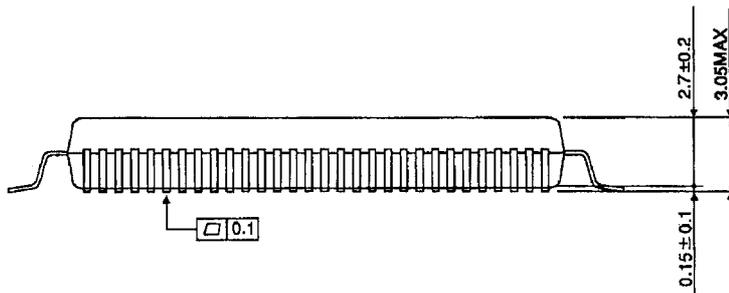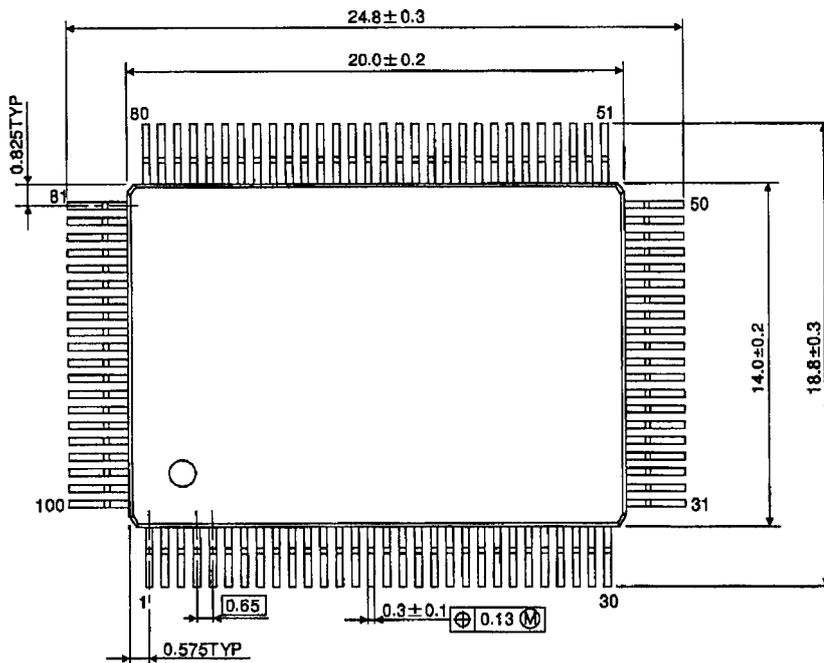

Weight : 1.6g (Typ.)

RESTRICTIONS ON PRODUCT USE

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.