

# DP83848I PHYTER Single to DP83848K/T PHYTER Mini System Rollover Document

National Semiconductor  
Application Note 1855  
Devin Seely  
September 3, 2008



## Purpose

This is an informational document detailing points to be considered when migrating an existing 10/100 Mb/s Ethernet design using the National Semiconductor DP83848I PHYTER product to the smaller DP83848K or DP83848T products.

The DP83848I and DP83848K/T feature the following:

- Support 10/100 MII interface
- Operation over the industrial temperature range
- Compliant with IEEE 802.3 specification

This document compares differences including feature set, pin functions, package and pinout, and possible register operation differences between DP83848I and DP83848K/T to simplify end user setup and help ensure a better user experience. The impact to a design is dependant on features used and their implementation.

## 1.0 Required Changes

This section documents the hardware changes required to transition from the DP83848I to the DP83848K or DP83848T. The required changes for proper operation include package, pinout, bias and termination connections.

### 1.1 PACKAGE

The DP83848I is available in a 48 pin LQFP package. The DP83848K/T comes in a 40 pin LLP package. The differences in package between DP83848I and DP83848K/T are shown in Table 1. For more information on the DP83848 packages please visit

<http://www.national.com/analog/packaging/>

TABLE 1. Packaging Differences

	DP83848I	DP83848K/T
Package	48-LQFP	LLP 40
Footprint	7x7 mm	6x6 mm
Package Drawing	VBH48A	SQA40A

### 1.2 PINOUT

The DP83848I has 48 pins while the DP83848K/T have a reduced pin count. The LLP package used on the DP83848K/T also has an exposed DAP pad. Please see Appendix A for the pin mapping between DP83848I and DP83848K/T, as well as pins not applicable in the DP83848K/T.

### 1.3 PCB MODIFICATION

This section describes the DP83848I circuit modifications required to use the DP83848K/T in a similar design.

#### 1.3.1 PFBOUT

Both the DP83848I and DP83848K/T devices require similar connection of the Power Feedback circuit. Parallel capacitors

(10uF Tantalum and 0.1uF ceramic) should be placed close to PFBOUT, the output of the regulator. PFBIN1 and PFBIN2 should be externally connected to PFBOUT as shown in Figure 1. A small 0.1uF capacitor should be placed close to the PFBIN1 and PFBIN2 pins. The pin assignment differences between the DP83848I and DP83848K/T are summarized in Table 2.

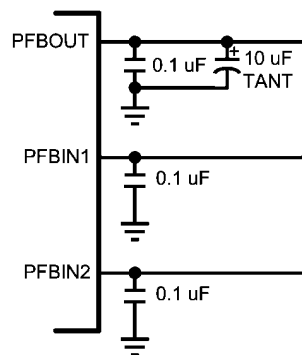


FIGURE 1. PFBOUT Connection

TABLE 2. Power Feedback Connections

Signal Name	DP83848I	DP83848K/T
PFBOUT	23	19
PFBIN1	18	16
PFBIN2	37	30

#### 1.3.2 Bias Resistor

Internal circuitry biasing for the devices is accomplished in a similar manner. The only difference is the bias connection pin number.

The 4.87 kohm connects to pin 24 on the DP83848I and pin 20 on the DP83848K/T.

TABLE 3. Bias Resistor Values

	DP83848I	DP83848K/T
Bias Resistor Value	4.87 kohm	4.87 kohm
Bias Pin	24	20

#### 1.3.3 Termination and PMD Biasing

DP83848I and DP83848K/T PMD interface require two pair of 49.9 Ohm resistors, biased to VDD of the device. This matching of the termination resistors and common biasing between the receiver and transmitter accommodates the Auto-MDIX feature.

Refer to Figure 2 for a graphic explanation of this.

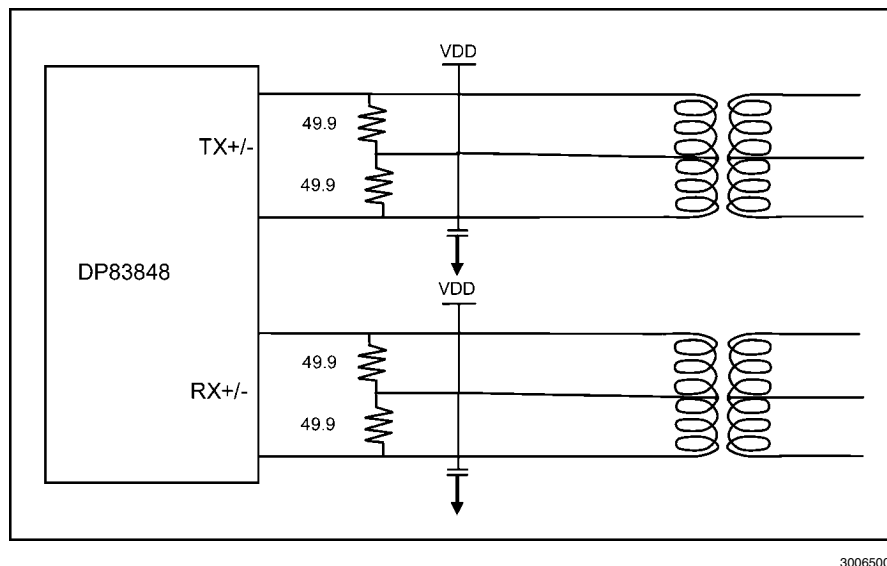


FIGURE 2. DP83848 PMD Connections (Termination)

## 2.0 Potential Changes

The following section describes the specific changes that may be necessary to convert to a DP83848K/T based design.

### 2.1 MII INTERFACE

The MII interface is used to connect the PHY to the MAC in 10/100 Mb/s systems. For a 5 V MII application, it is recommended to use 33 Ohm series resistors between the MAC and DP83848. The MII interface is a nibble-wide interface consisting of transmit data, receive data and control signals.

The transmit interface is comprised of the following signals:

- Transmit data bus, TXD[0:3] (pins 4, 5, 6 and 7 in DP83848K/T)
- Transmit enable signal, TX\_EN (pin 3 in DP83848K/T)
- Transmit clock, TX\_CLK (pin 2 in DP83848K/T) which runs at 2.5 MHz in 10 Mb/s mode and 25 MHz in 100 Mb/s mode

The receive interface is comprised of the following signals:

- Receive data bus, RXD[0:3] (pin 36, 37, 38 and 39 in DP83848K/T)
- Receive error signal, RX\_ER (pin 34 in DP83848K/T)
- Receive data valid, RX\_DV (pin 32 in DP83848K/T)
- Receive clock, RX\_CLK (pin 31 in DP83848K/T) for synchronous data transfer which runs at 2.5 MHz in 10 Mb/s mode and 25 MHz in 100 Mb/s mode

Refer to Appendix A for a DP83848I to DP83848K/T pin mapping.

### 2.2 PHY ADDRESS

In a given system, multiple PHYs may be controlled by a single MII management interface. In order to support this, each PHY must have a unique address. DP83848 facilitates this with PHY address strap options.

In the DP83848, RXD[0:3] and COL are also used at power-up or reset time to set the PHY address. Pin COL has a weak internal pull-up and RXD[0:3] have weak internal pull-downs. Hence, the default PHY address setting in the DP83848I and

DP83848K/T is 01h. To change the PHY address, from the default, add external 2.2 kohm pull-ups or pull-downs to the appropriate pin(s).

### 2.3 PHYSICAL LAYER ID REGISTER

The PHYSical Layer ID (PHYID) register allows system software to determine applicability of device specific software based on the vendor model number. The vendor model number is represented by bits 9 to 4 in PHYIDR2. The vendor model number in DP83848I is 001001b. For the DP83848K/T, the vendor model number is also 001001b.

TABLE 4. Register Change for Vendor Model Number

Register Address	Register Name	Register Description	Device	
Hex			DP83848 I	DP83848 K/T
03h	PHYIDR2	PHY ID 2	5C90h	5C90h

### 2.4 AUTO-NEGOTIATION AND LED PINS

DP83848I has 3 multifunction pins to configure the Auto-Negotiation capabilities. At power-up or reset time they strap the media mode and during normal operation they provide status LED indications. Pin 26 has multiple LED functions, Activity or Collision status, as well as enabling Auto-Negotiation. Pin 28 indicates link status and controls the advertised or forced mode (AN0) of DP83848I. Pin 27 indicates speed status and controls the advertised and forced mode (AN1) of DP83848I.

Due to the reduced pin count in the DP83848K/T, the strapping options for Auto-Negotiation are reduced. For the DP83848K, the ability to strap a forced mode is not available. The DP83848T has an additional limitation of not being able to advertise 10 Base-T or 100 Base-TX only modes. The available Auto-Negotiation strapping modes are summarized in Table 6, Table 7, and Table 8. The full range of operating mode options are still through register access.

TABLE 5. DP83848 Pins for Auto-Negotiation and LED

DP83848I Pin Number	Auto-Negotiation Function	LED Function
26	Auto-Negotiation enable	Activity and collision status
27	Controls the advertised and forced mode (AN1)	Speed status
28	Controls the advertised and forced mode (AN0)	Link status

TABLE 6. DP83848I Auto-Negotiation Modes

AN_EN	AN0	AN1	Forced Mode
0	0	0	10 Base-T, Half-Duplex
0	0	1	10 Base-T, Full-Duplex
0	1	0	100 Base-TX, Half-Duplex
0	1	1	100 Base-TX, Full-Duplex
AN_EN	AN0	AN1	Advertised Mode
1	0	0	10 Base-T, Half/Full-Duplex
1	0	1	100 Base-TX, Half/Full-Duplex
1	1	0	10 Base-T, Half-Duplex 100 Base-TX, Half-Duplex
1	1	1	10 Base-T, Half/Full-Duplex 100 Base-TX, Half/Full-Duplex

TABLE 7. DP83848K Auto-Negotiation Modes

AN0	AN1	Advertised Mode
0	0	10 Base-T, Half/Full-Duplex
0	1	100 Base-TX, Half/Full-Duplex
1	0	10 Base-T, Half-Duplex 100 Base-TX, Half-Duplex
1	1	10 Base-T, Half/Full-Duplex 100 Base-TX, Half/Full-Duplex

TABLE 8. DP83848T Auto-Negotiation Modes

AN0	Advertised Mode
0	10 Base-T, Half-Duplex 100 Base-TX, Half-Duplex
1	10 Base-T, Half/Full-Duplex 100 Base-TX, Half/Full-Duplex

### 3.0 Informational Changes

This section compares the features offered in the DP83848I and DP83848K/T and the changes required to implement them.


TABLE 9. DP83848I to DP83848K/T Feature Comparison

	DP83848I	DP83848K/T
<b>System Interfaces</b>		
<b>RMII</b>	Yes	Yes
<b>SNI</b>	Yes	No
<b>JTAG</b>	Yes	No
<b>Features</b>		
<b>Auto-MDIX</b>	Yes	Yes
<b>Energy Detect</b>	Yes	Yes
<b>LED Outputs</b>	3	2 (K) 1 (T)
<b>CLK-to-MAC Output</b>	Yes	No (K) Yes (T)
<b>Power Down/Interrupt</b>	Yes	No
<b>Temperature Range</b>	-40 to 85 °C	-40 to 85 °C
<b>Power Consumption</b>		
<b>Active Power (Typ)</b>	264 mW	267 mW (K) 297 mW (T)

#### 3.1 RMII INTERFACE

The RMII interface can be used to connect the MAC to the PHY, in 10/100 Mb/s systems, using a reduced number of pins. By utilizing this feature, significant PCB space savings can be realized within the system, especially a design with a large number of physical layer devices.

DP83848 uses an external 50 MHz clock (X1) as reference for both transmit and receive in the RMII mode. The 50 MHz is provided by an external oscillator. To enable RMII mode, RX\_DV should be pulled high using a 2.2 kohm resistor. Refer to *Figure 3*.

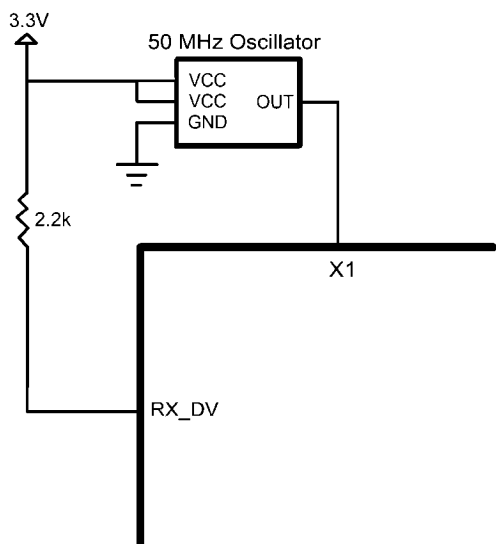

30065004

FIGURE 3. RMII Selection


#### 3.2 SNI MODE

DP83848I incorporates a 10 Mb/s Serial Network Interface (SNI) which allows a simple data interface for 10 Mb/s only system. While there is no defined standard for this interface, the interface is based on the earlier National Semiconductor 10 Mb/s physical layer devices. The DP83848K/T devices do not support SNI mode. The following pins are used in SNI mode:

- TX\_CLK
- TX\_EN
- TXD\_0
- RX\_CLK
- RXD\_0
- CRS
- COL

#### 3.3 AUTO\_MDIX SETTING

Auto-MDIX removes cabling complications and simplifies end customer applications by allowing either a straight or a cross-over cable to be used without changing the system configuration. When enabled, this function utilizes Auto-Negotiation to determine the proper configuration for transmission and reception of data and subsequently selects the appropriate MDI pair for MDI/MDIX operation. Auto-MDIX is enabled by default in the DP83848I, DP83848K and DP83848T. To disable Auto-MDIX, RX\_ER should be pulled to ground using a 2.2 kohm resistor. See *Figure 4*.

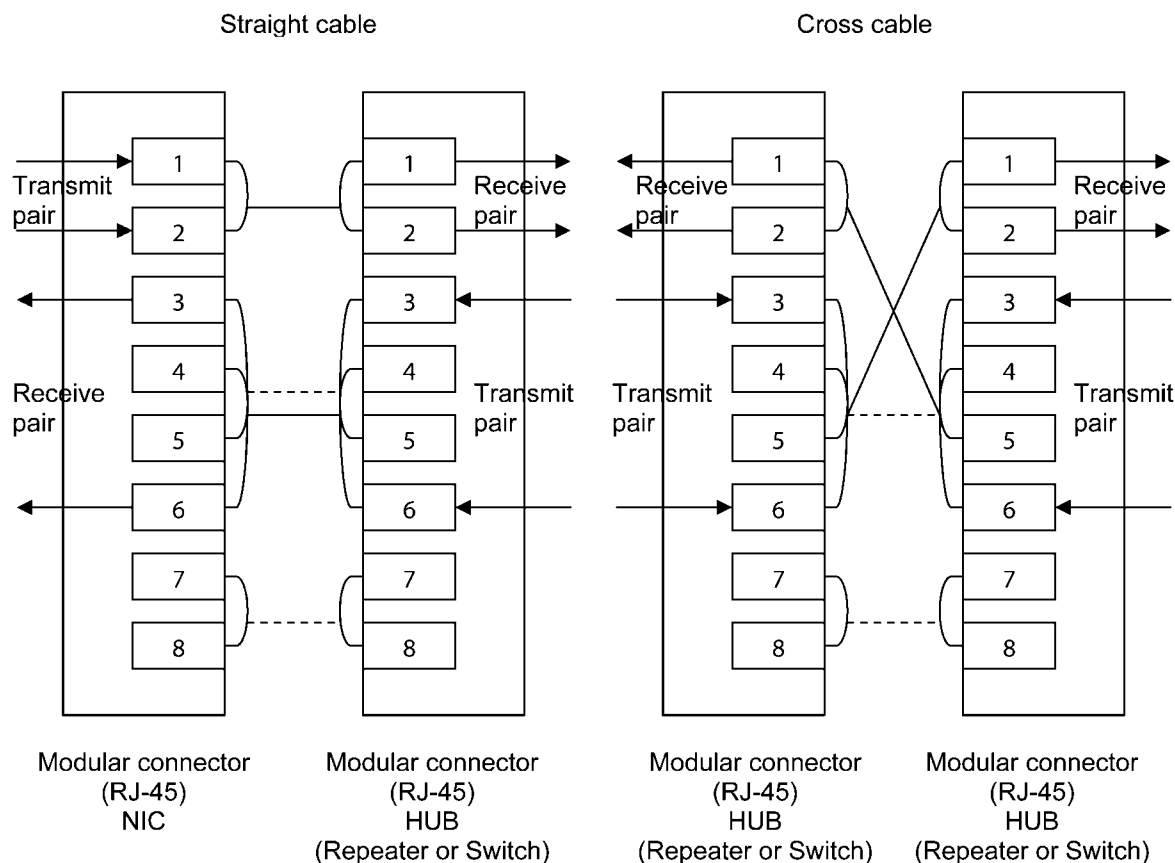

30065005

**FIGURE 4. Auto-MDIX Operation**

### 3.4 ENERGY DETECT

Energy Detect facilitates flexible and automatic power management based on detection of a signal on the cable. This enables an application to use an absolute minimum amount of power over time. Energy Detect functionality is controlled via the Energy Detect Control Register (EDCR), address 1Dh. When Energy detect is enabled and there is no activity on the cable, the PHY will remain in a low power mode while monitoring the receive pair in the transmission line. Activity on the line will cause the PHY to return to the normal power mode.

### 3.5 CLOCK OUTPUT

DP83848I offers a clock output (25MHz\_OUT) that may be routed directly to the MAC and act as the MAC reference clock, eliminating the need, and hence space and cost, of an additional MAC clock source. In MII mode, the clock output is 25 MHz, and in RMII mode, the clock is a 50 MHz output. The DP83848T has a 25MHz\_OUT pin, while the DP83848K does

not. It should be noted that there are special considerations for using this output pin which are discussed in application note AN-1405.

### 3.6 POWER DOWN / INTERRUPT

DP83848I offers a separate, multifunction pin to allow the system to power down the device, or to indicate an interrupt. In Power\_Down mode, the PWR\_DOWN/INT pin (pin 7) may be asserted low to put the device in a power down state. In Interrupt mode, this pin is an open drain output and will be asserted low when an interrupt condition occurs, based on various criteria defined by the MISR and MICR registers. It is recommended to use an external pull-up resistor for proper operation of this function.

The interrupt functionality is not available in the DP83848K/T. The Power Down functionality is only available through register access in the DP83848K/T.

## Appendix A

TABLE 10. DP83848I & DP83848K/T Pin Map

Signal Name	DP83848I Pin #	DP83848K/T Pin #	Description
<b>MII Interface Pins</b>			
MDC	31	25	MGMT DATA CLOCK
MDIO	30	24	MGMT DATA I/O
RXD[0:3]/PHYAD[1:4]	43,44,45,46	36,37,38,39	MII RX DATA
RX_CLK	38	31	MII RX CLOCK
RX_ER/MDIX_EN	41	34	MII RX ERROR
RX_DV/MII_MODE	39	32	MII RX DATA VALID
TXD[0:3]	3,4,5,6	4,5,6,7	MII TX DATA
TX_CLK	1	2	MII TX CLOCK
TX_EN	2	3	MII TX ENABLE
COL/PHYAD0	42	35	MII COLLISION DETECT
CRS/LED_CFG	40	33	MII CARRIER SENSE
<b>PMD Interface Pins</b>			
RD-/+	13,14	11,12	RX DATA
TD-/+	16,17	14,15	TX DATA
<b>Clock Interface Pins</b>			
X1	34	28	XTAL/OSC INPUT
X2	33	27	XTAL OUTPUT
<b>LED Interface Pins</b>			
LED_ACT/COL/AN_EN	26	n/a	COLLISION LED STATUS
LED_ACT/COL/AN_EN	26	n/a	DUPLEX LED STATUS
LED_LINK/AN_0	28	22	LINK LED STATUS
LED_SPEED/AN_1	27	21 (K) n/a (T)	SPEED LED STATUS
LED_ACT/COL/AN_EN	26	n/a	ACTIVITY LED STATUS
<b>JTAG Interface Pins</b>			
TCK	8	n/a	TEST CLOCK
TDO	9	n/a	TEST DATA OUTPUT
TMS	10	n/a	TEST MODE SELECT
TRST#	11	n/a	TEST RESET
TDI	12	n/a	TEST DATA INPUT
<b>Reset Function Pin</b>			
RESET_N	29	23	RESET
<b>Strap Pins</b>			
PHYAD[0:4]	42,43,44,45,46	35,36,37,38,39	PHY ADDRESS
MDIX_EN/RX_ER	41	34	AUTO MDIX ENABLE
MII_MODE/RX_DV	39	32	MII MODE SELECT
SNI_MODE/TXD3	6	n/a	MII MODE SELECT
LED_CFG/CRS	40	33	LED CONFIGURATION
<b>Bias Function Pins</b>			
RBIAS	24	20	BIAS RESISTOR CONNECTION
<b>Test Mode Pins</b>			
AN_0/LED_LINK	28	22	TEST MODE SELECT
AN_1/LED_SPEED	27	21 (K) n/a (T)	TEST MODE SELECT
AN_EN/LED_ACT/COL	26	n/a	TEST MODE SELECT
<b>Special Function Pins</b>			

Signal Name	DP83848I Pin #	DP83848K/T Pin #	Description
25MHz_OUT	25	n/a (K) 21 (T)	25 MHz CLOCK OUTPUT
PWR_DOWN/INT	7	n/a	POWER DOWN/INT
PFBIN1	18	16	POWER FEEDBACK IN
PFBIN2	37	30	POWER FEEDBACK IN
PFBOUT	23	19	POWER FEEDBACK OUT
<b>Supply Pins</b>			
VDD	22,32,48	1,18,26	3.3 V
GND	15,19,35,36,47	13,17,29,40	GROUND
<b>Reserved Pins</b>			
RESERVED	20,21	8,9,10	RESERVED

## Appendix B

This section covers differences between the registers in DP83848I and DP83848K/T applicable to software configuration of these devices.

### Register Differences

IEEE specified registers of National Semiconductor Physical Layer devices comply with the respective IEEE standards. Only vendor specific registers have functions that may vary from device to device. If no vendor specific registers are modified for operation in the system application, the devices will have similar operation. Specific functions of these vendor defined registers may be available in another register or possibly in a different bit within the same register location.

**TABLE 11. Register Bit Definitions**

Reg Addr	Reg Name	Register Description	Device	
			DP83848I	DP83848K/T
Hex				
10h	PHYSTS	PHY Status Register	Bit 7 MII Interrupt	Bit 7 Reserved
11h	MICR	MII Interrupt Control Register	Bit 2 TINT Bit 1 INTEN Bit 0 INT_OE	Bit 2 Reserved Bit 1 Reserved Bit 0 Reserved
12h	MISR	MII Interrupt Status Register	Bit 14 ED_INT Bit 13 LINK_INT Bit 12 SPD_INT Bit 11 DUP_INT Bit 10 ANC_INT Bit 9 FHF_INT Bit 8 RHF_INT Bit 6 UNMSK_ED Bit 5 UNMSK_LINK Bit 4 UNMSK_JAB Bit 3 UNMSK_RF Bit 2 UNMSK_ANC Bit 1 UNMSK_FHF Bit 0 UNMSK_RHF	Bit 14 Reserved Bit 13 Reserved Bit 12 Reserved Bit 11 Reserved Bit 10 Reserved Bit 9 Reserved Bit 8 Reserved Bit 6 Reserved Bit 5 Reserved Bit 4 Reserved Bit 3 Reserved Bit 2 Reserved Bit 1 Reserved Bit 0 Reserved
16h	PCSR	PCS Sub-Layer Configuration and Status Register	Bit 12 BYP_4B5B	Bit 12 Reserved
18h	LEDCR	LED Direct Control Register	Bit 5 DRV_SPDLED Bit 3 DRV_ACTLED Bit 2 SPDLED Bit 0 ACTLED	Bit 5 Reserved (T) Bit 3 Reserved Bit 2 Reserved (T) Bit 0 Reserved
19h	PHYCR	PHY Control Register	Bit 6 LEDCNFG[1]	Bit 6 Reserved
1Ah	10BT_SERIAL	10Base-T Status/Control Register	Bit 15 10BT_SERIAL Bit 14 REJECT 100 BASE T Bits 13:12 ERROR RANGE	Bit 15 Reserved Bit 14 Reserved Bits 13:12 Reserved

For additional information on these devices, please refer to the applicable datasheet(s).

DP83848I datasheet –

<http://www.national.com/pf/DP/DP83848I.pdf>

DP83848K datasheet –

<http://www.national.com/ds/DP/DP83848K.pdf>

DP83848T datasheet –

<http://www.national.com/ds/DP/DP83848T.pdf>



## Notes

# Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:

Products		Design Support	
Amplifiers	<a href="http://www.national.com/amplifiers">www.national.com/amplifiers</a>	WEBENCH	<a href="http://www.national.com/webench">www.national.com/webench</a>
Audio	<a href="http://www.national.com/audio">www.national.com/audio</a>	Analog University	<a href="http://www.national.com/AU">www.national.com/AU</a>
Clock Conditioners	<a href="http://www.national.com/timing">www.national.com/timing</a>	App Notes	<a href="http://www.national.com/appnotes">www.national.com/appnotes</a>
Data Converters	<a href="http://www.national.com/adc">www.national.com/adc</a>	Distributors	<a href="http://www.national.com/contacts">www.national.com/contacts</a>
Displays	<a href="http://www.national.com/displays">www.national.com/displays</a>	Green Compliance	<a href="http://www.national.com/quality/green">www.national.com/quality/green</a>
Ethernet	<a href="http://www.national.com/ethernet">www.national.com/ethernet</a>	Packaging	<a href="http://www.national.com/packaging">www.national.com/packaging</a>
Interface	<a href="http://www.national.com/interface">www.national.com/interface</a>	Quality and Reliability	<a href="http://www.national.com/quality">www.national.com/quality</a>
LVDS	<a href="http://www.national.com/lvds">www.national.com/lvds</a>	Reference Designs	<a href="http://www.national.com/refdesigns">www.national.com/refdesigns</a>
Power Management	<a href="http://www.national.com/power">www.national.com/power</a>	Feedback	<a href="http://www.national.com/feedback">www.national.com/feedback</a>
Switching Regulators	<a href="http://www.national.com/switchers">www.national.com/switchers</a>		
LDOs	<a href="http://www.national.com/ldo">www.national.com/ldo</a>		
LED Lighting	<a href="http://www.national.com/led">www.national.com/led</a>		
PowerWise	<a href="http://www.national.com/powerwise">www.national.com/powerwise</a>		
Serial Digital Interface (SDI)	<a href="http://www.national.com/sdi">www.national.com/sdi</a>		
Temperature Sensors	<a href="http://www.national.com/tempsensors">www.national.com/tempsensors</a>		
Wireless (PLL/VCO)	<a href="http://www.national.com/wireless">www.national.com/wireless</a>		

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

## LIFE SUPPORT POLICY

**NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION.** As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2008 National Semiconductor Corporation

For the most current product information visit us at [www.national.com](http://www.national.com)



**National Semiconductor  
Americas Technical  
Support Center**  
Email: [support@nsc.com](mailto:support@nsc.com)  
Tel: 1-800-272-9959

**National Semiconductor Europe  
Technical Support Center**  
Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)  
German Tel: +49 (0) 180 5010 771  
English Tel: +44 (0) 870 850 4288

**National Semiconductor Asia  
Pacific Technical Support Center**  
Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor Japan  
Technical Support Center**  
Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)