


LM2758 Flash LED Driver Evaluation Board

National Semiconductor
Application Note 1695
April 9, 2008



Schematic

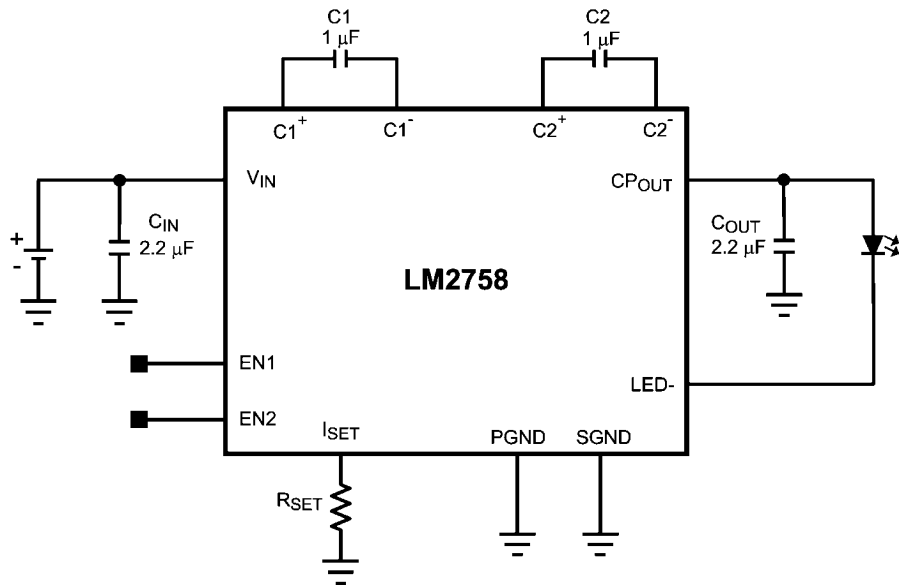

30034501

Bill of Materials

Manufacturer	Part #	Description	Designation	Quantity
National Semiconductor	LM2758TL	Flash LED Driver	U1	1
TDK	C1608X5R0J225	Ceramic cap, 2.2 μF, 6.3V, 0603	C _{IN} , C _{OUT}	2
TDK	C1608X5R0J105	Ceramic cap, 1.0 μF, 6.3V, 0603	C ₁ , C ₂	2
Luxeon	LXCL-PWF3	Flash LED	LED	1
Vishay	CRCW06032002F	Res, 20 kΩ	R ₁	1
Tycol/Amp	4-103239-0-03	1 x 3, 0.1" header	EN ₁ , EN ₂	2
Keystone Electronics	1573-2	Turret, DBL.0.82"L, .072 dia.	V _{IN} GND, GND, V _b , V _{OUT} , LED-K, LED-A	7
Johnson Components	108-0902-001	Banana Jack, Insulated, Red	V _{IN}	1
Johnson Components	108-0903-001	Banana Jack, Insulated, Black	GND	1

LM2758 Flash LED Driver Evaluation Board

STARTUP SEQUENCE

Applying power to the V_{IN} and EN pins at the same time will cause the LM2758 to start up in an unknown state. For this reason, it is not advised to apply power to the device while the EN jumper blocks is set to the "ON" position. To startup the Evaluation board, set the EN1 jumper and EN2 jumper to the "OFF" position, apply power to the board, and then move the EN jumper(s) to the "ON" position. This is the expected start-up operation in the typical application where V_{IN} is tied to a voltage rail and the EN pins are controlled via logic signal.

EN1	EN2	Mode
0	0	Shutdown
1	0	Indicator
0	1	Torch
1	1	Flash

GAIN TRANSITION


Gain modes are designed to transition to the next higher gain when needed. The gain mode will stay in that higher gain until the Shutdown mode is cycled, resetting the gain to the lowest level. To reset the part to the minimum gain on the Evaluation board, place the EN1 jumper and EN2 jumper to the "OFF" position, then to the "ON" position according to the Truth Table to the desired mode.

INPUT AND OUTPUT FILTERS

Ferrite beads along with ceramic capacitors could be used at the input and output pin to filter out switching noise.


For detailed operating descriptions, please see the LM2758 datasheet.

LM2758 Flash LED Driver Evaluation Board Layout

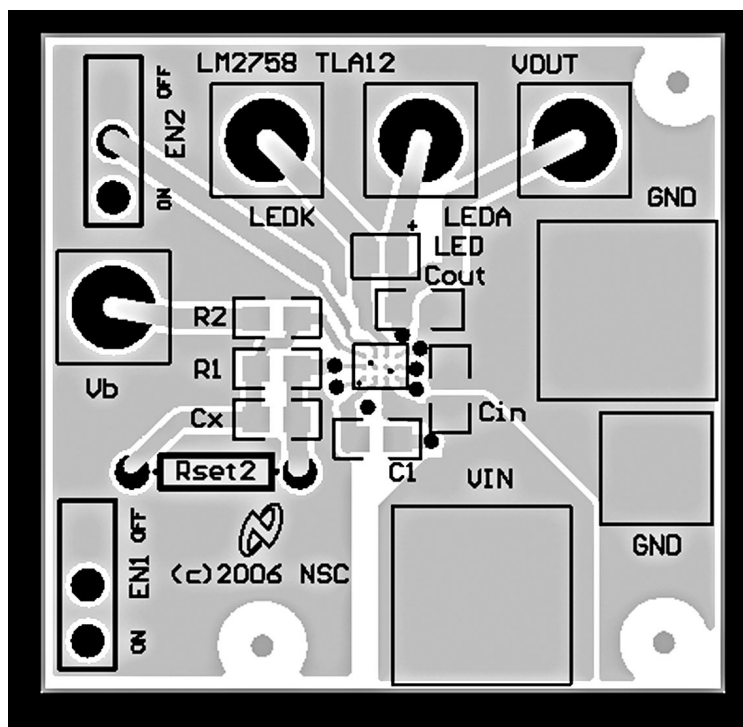

Top Layer

30034510

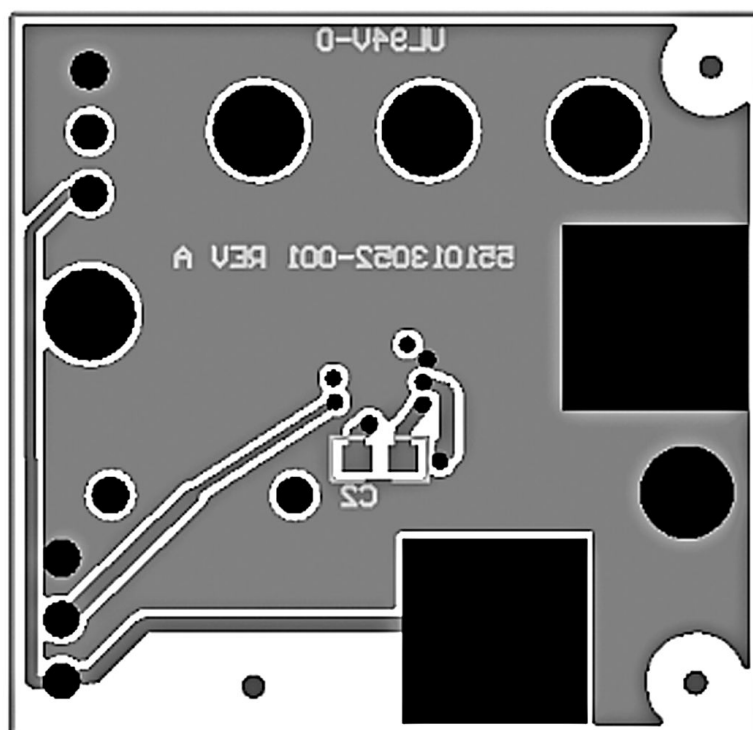

Bottom Layer

30034511

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:

Products		Design Support	
Amplifiers	www.national.com/amplifiers	WEBENCH	www.national.com/webench
Audio	www.national.com/audio	Analog University	www.national.com/AU
Clock Conditioners	www.national.com/timing	App Notes	www.national.com/appnotes
Data Converters	www.national.com/adc	Distributors	www.national.com/contacts
Displays	www.national.com/displays	Green Compliance	www.national.com/quality/green
Ethernet	www.national.com/ethernet	Packaging	www.national.com/packaging
Interface	www.national.com/interface	Quality and Reliability	www.national.com/quality
LVDS	www.national.com/lvds	Reference Designs	www.national.com/refdesigns
Power Management	www.national.com/power	Feedback	www.national.com/feedback
Switching Regulators	www.national.com/switchers		
LDOs	www.national.com/ldo		
LED Lighting	www.national.com/led		
PowerWise	www.national.com/powerwise		
Serial Digital Interface (SDI)	www.national.com/sdi		
Temperature Sensors	www.national.com/tempsensors		
Wireless (PLL/VCO)	www.national.com/wireless		

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2008 National Semiconductor Corporation

For the most current product information visit us at www.national.com



**National Semiconductor
Americas Technical
Support Center**
Email:
new.feedback@nsc.com
Tel: 1-800-272-9959

**National Semiconductor Europe
Technical Support Center**
Email: europe.support@nsc.com
German Tel: +49 (0) 180 5010 771
English Tel: +44 (0) 870 850 4288

**National Semiconductor Asia
Pacific Technical Support Center**
Email: ap.support@nsc.com

**National Semiconductor Japan
Technical Support Center**
Email: jpn.feedback@nsc.com