

# How to Meet the HDMI 5V Source Requirement

National Semiconductor  
Application Note 1998  
Kevin McCrory and Larry Virgilio  
August 28, 2009



## Introduction

The mobile device industry has recognized multimedia content, and the ability to share that content, as a major focus to satisfy customer demand and drive growth. The ever-increasing popularity of websites such as YouTube, Facebook, and MySpace illustrate this demand. In January 2009 alone, YouTube users watched six billion videos. It is also estimated that 20 hours of new video are uploaded to YouTube every minute (Reference 1). This increasing desire for online interaction with friends and loved ones fundamentally drives demand for a personal device which is portable and sufficient at capturing and replaying multimedia.

At the same time, a revolution is happening in the home entertainment market. High-resolution digital content is becoming the norm and is driven through products like high-definition television programming, digital video recorders, BluRay DVDs, 1080p flat panel televisions, high-resolution personal video cameras, and 5.1 surround sound audio systems. In order to enable connectivity between these various units, high-definition multimedia interface (HDMI) has emerged as the standard for high-definition audio and video. In January 2009, HDMI Licensing LLC announced over 600 million HDMI-enabled devices are in existence worldwide. In-Stat estimates another 394 million HDMI devices will ship in 2009 (Reference 2).

Ubiquitous cameras, large displays, 3G connectivity, expanding memory, and powerful processors have made the latest generation of mobile products and handsets more than capable of capturing and storing multimedia content. The next step for the on-the-go user is to be able to easily share and review this content in a comfortable medium. The domination of HDMI in the home entertainment market offers a clear solution for bridging the gap to a user's mobile content. By implementing HDMI, a mobile device now offers the user seamless integration with virtually all new entertainment systems.

## HDMI Compliance Requirements

Based on the requirements set forth in the HDMI Specification Version 1.3a, compliance requires each node sourcing a 5V power signal to be regulated and well protected. This 5V source must be current limited and also provide reverse current protection during many system scenarios (Reference 3). Section 4.2.7 of Version 1.3a provides full detail of the regulation requirements. In summary,

A source shall:

- Provide a voltage between 4.8V and 5.3V
- Implement over-current protection of less than 0.5A
- Supply a minimum of 55 mA

A sink shall:

- Not draw more than 10 mA from the power signal, when powered on

- Assume any voltage within 4.7V and 5.3V indicates a source is connected

Section 4.2.11 of Version 1.3a outlines the protection needed on the 5V supply; namely,

- No damage to the HDMI source or sink can result from the shorting of any combination of signals on any connector. If two HDMI sources are connected together with a single cable, no damage can occur to either of the sources. If two HDMI sinks are connected together with a single cable, no damage can occur to either of the sinks.

The implication of Section 4.2.11 is that an ordinary 5V regulated supply cannot be used. It must apply protection so that if another source is applied to the pin, the reverse current will not damage any part of the circuit. In a mobile device, this applies when the device is operating and even when the device is powered down or without power at all (battery has been removed).

## Regulation and Protection Through Integrated Circuits


Fortunately, there are completely integrated circuits that can perform this type of protection while also supplying a regulated 5V. One example is National's PowerWise® LM2757 boost regulator.

The LM2757 is a constant-frequency, preregulated, switched-capacitor charge pump that operates at 1.25 MHz to produce a low-noise regulated output voltage. The device can provide up to 180 mA at 5V.

In order to meet HDMI protection standards, the LM2757 regulator presents high impedance at the  $V_{OUT}$  pin when shut down or with no power at the  $V_{IN}$  pin.

When the LM2757 regulator is operating and supplying 5V, several protection features may be implemented, depending on the fault condition. If the output is shorted to ground, current limit will allow no more than 250 mA to be sourced. If this short is sustained, the device will continue to source current until thermal shutdown is reached. If another HDMI source is applied to the output of the LM2757 regulator and that source voltage is below that of the LM2757, then the LM2757 device will regulate that voltage up to that of the LM2757. Only enough current will be sourced to regulate that voltage up to the LM2757. The LM2757 regulator does not sink current; therefore, if another HDMI source is connected which has a higher voltage, the device will act as though no regulation is needed.

Figure 1 illustrates an example of how the LM2757 boost regulator can be implemented. The device is offered in a 1.2 mm x 1.6 mm x 0.4 mm package and requires only four small external capacitors. Therefore, with a total solution size of less than 12 mm<sup>2</sup>, this sophisticated 5V supply can be implemented with minimal impact to the overall size of the end system.

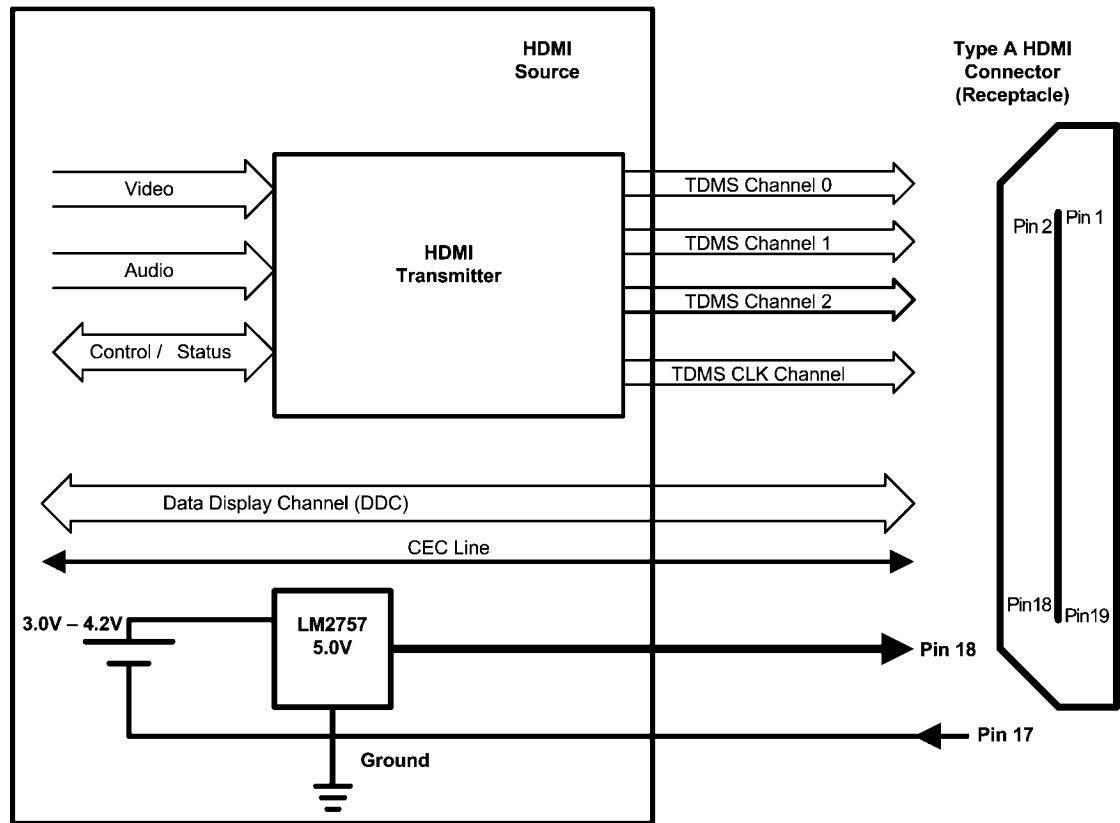

30104501

FIGURE 1. HDMI System Block Diagram

## Conclusion

On-the-go multimedia functionality is an exciting and in-demand future direction of mobile devices. HDMI is a logical way to implement connectivity of multimedia content to other nodes in the home and on the road. If HDMI is the mobile solution of choice, integrated circuits such as the LM2757 regulator make adoption easy and space efficient.

## References

1. "YouTube," Wikipedia
2. "HDMI," Wikipedia
3. "High-Definition Multimedia Interface Specification Version 1.3a," Hitachi, Ltd., Matsushita Electric Industrial Co., Ltd., Philips Consumer Electronics, International B.V., Silicon Image, Inc., Sony Corporation, Thomson Inc., Toshiba Corporation, November 10, 2006.



## Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:

Products		Design Support	
Amplifiers	<a href="http://www.national.com/amplifiers">www.national.com/amplifiers</a>	WEBENCH® Tools	<a href="http://www.national.com/webench">www.national.com/webench</a>
Audio	<a href="http://www.national.com/audio">www.national.com/audio</a>	App Notes	<a href="http://www.national.com/appnotes">www.national.com/appnotes</a>
Clock and Timing	<a href="http://www.national.com/timing">www.national.com/timing</a>	Reference Designs	<a href="http://www.national.com/refdesigns">www.national.com/refdesigns</a>
Data Converters	<a href="http://www.national.com/adac">www.national.com/adac</a>	Samples	<a href="http://www.national.com/samples">www.national.com/samples</a>
Interface	<a href="http://www.national.com/interface">www.national.com/interface</a>	Eval Boards	<a href="http://www.national.com/evalboards">www.national.com/evalboards</a>
LVDS	<a href="http://www.national.com/lvds">www.national.com/lvds</a>	Packaging	<a href="http://www.national.com/packaging">www.national.com/packaging</a>
Power Management	<a href="http://www.national.com/power">www.national.com/power</a>	Green Compliance	<a href="http://www.national.com/quality/green">www.national.com/quality/green</a>
Switching Regulators	<a href="http://www.national.com/switchers">www.national.com/switchers</a>	Distributors	<a href="http://www.national.com/contacts">www.national.com/contacts</a>
LDOs	<a href="http://www.national.com/ldo">www.national.com/ldo</a>	Quality and Reliability	<a href="http://www.national.com/quality">www.national.com/quality</a>
LED Lighting	<a href="http://www.national.com/led">www.national.com/led</a>	Feedback/Support	<a href="http://www.national.com/feedback">www.national.com/feedback</a>
Voltage Reference	<a href="http://www.national.com/vref">www.national.com/vref</a>	Design Made Easy	<a href="http://www.national.com/easy">www.national.com/easy</a>
PowerWise® Solutions	<a href="http://www.national.com/powerwise">www.national.com/powerwise</a>	Solutions	<a href="http://www.national.com/solutions">www.national.com/solutions</a>
Serial Digital Interface (SDI)	<a href="http://www.national.com/sdi">www.national.com/sdi</a>	Mil/Aero	<a href="http://www.national.com/milaero">www.national.com/milaero</a>
Temperature Sensors	<a href="http://www.national.com/tempsensors">www.national.com/tempsensors</a>	SolarMagic™	<a href="http://www.national.com/solarmagic">www.national.com/solarmagic</a>
Wireless (PLL/VCO)	<a href="http://www.national.com/wireless">www.national.com/wireless</a>	PowerWise® Design University	<a href="http://www.national.com/training">www.national.com/training</a>

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

### LIFE SUPPORT POLICY

**NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION.** As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2009 National Semiconductor Corporation

For the most current product information visit us at [www.national.com](http://www.national.com)



**National Semiconductor  
Americas Technical  
Support Center**  
Email: [support@nsc.com](mailto:support@nsc.com)  
Tel: 1-800-272-9959

**National Semiconductor Europe  
Technical Support Center**  
Email: [europe.support@nsc.com](mailto:europe.support@nsc.com)

**National Semiconductor Asia  
Pacific Technical Support Center**  
Email: [ap.support@nsc.com](mailto:ap.support@nsc.com)

**National Semiconductor Japan  
Technical Support Center**  
Email: [jpn.feedback@nsc.com](mailto:jpn.feedback@nsc.com)